

16 January 2026

# IMO Short-term Measures: A Review of the Carbon Intensity Indicator (CII)

The Carbon Intensity Indicator (CII) is one of the short-term measures introduced by the International Maritime Organization (IMO) to reduce greenhouse gas emissions from shipping. This policy brief reviews the measure and provides improvement recommendations, focusing on how emission standards at sea and at port should be dealt with.

## Background

The maritime industry facilitates over 85% of global goods trade, in volume terms, while contributing 2.1%, on a well-to-wake basis, of global greenhouse gas (GHG) emissions<sup>1</sup>. The International Maritime Organization (IMO) has established a target to achieve net-zero emissions from international shipping by or around 2050<sup>2</sup>. The report focuses on one of the IMO's short-term measures, the Carbon Intensity Indicator (CII). As the adoption of IMO's Net-Zero Framework (NZF) is now uncertain, it is not within the scope of this report.

The CII aims to ensure continuous improvement of a ship's operational carbon intensity<sup>3</sup>. It came into effect on 1 January 2023 and applies to ships of 5,000 gross tonnage and above<sup>3</sup>. Other regulations, such as the Energy Efficiency Design Index (EEDI) and the Energy Efficiency Existing Ship Index (EEXI), consider vessel design and retrofitting but cannot incentivise operational improvements<sup>4,5</sup>.

As is shown in Box (1), CII is calculated as the vessel's carbon dioxide (CO<sub>2</sub>) emissions divided by its transport capacity times the distance travelled<sup>6</sup>: Based on its CII, a vessel is rated A, B, C, D or E (where A is the best). To comply with the IMO's CII, vessels need to be rated C or above. If they are rated with D for three consecutive years or E for one year, vessels need to submit a corrective action plan<sup>3</sup>.

### Box 1. CII Formulae

$$CII = \frac{CO_2}{Transport\ capacity \times Distance} \quad (1)$$

The 2023 IMO GHG Strategy sets out the levels of ambition to reduce GHG emissions and

### Key Highlights:


- CII is currently insufficient for capturing emissions accurately at sea and at port and incentivising emission reduction
- A range of revision options could be considered such as excluding port emissions, adjustments for time at port, or separate metrics for at sea and at port
- Other areas that could be considered include allowance for actual cargo, well-to-wake emissions, and pilot fuel

**Recommended revision for CII is to use separate metrics for at sea and at port emissions.**

includes candidate mid- and long-term further measures with possible timelines and their impacts. The UK Government also has decarbonisation targets for the sector and has set a zero fuel lifecycle GHG emissions target for 2050<sup>7</sup>.

Despite the internationally mandatory CII requirement, Figure 1 shows that CII ratings have been worsening in all shipping sectors since 2023. In other words, improvement of vessel energy efficiency and operations are not catching up with the stricter CII regulations over time<sup>8</sup>. The main reasons are that (i) there are not yet clear regulatory implications for non-complying vessels and (ii) the measure's design needs to be improved.

Figure 1. CII Ratings by Vessel Sector

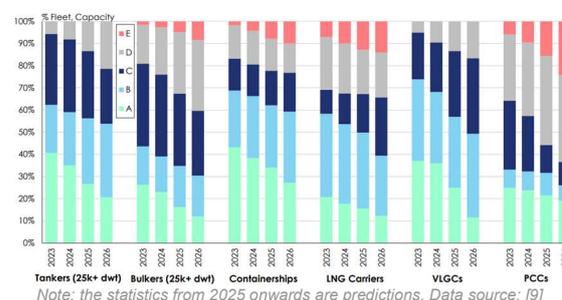

The IMO is committed to regular review of the CII. Since the evidence points to the lack of effectiveness of the measure, we turn to some improvement options. Note though that no improvement is expected to yield significant emission reductions unless compliance is enforced.

### Options to Improve the CII

One of the main areas of criticism about CII is the poor handling of port emissions. However, there are different definitions of port emissions (see Box (2)), and mixed views on whether to separate at sea (propulsion) and at port emissions. Four CII improvement options have been identified in the literature as follows:

- 1) Continue using the current CII that sums CO<sub>2</sub> emissions at sea and at port (as shown in Box 1)
- 2) Exclude port CO<sub>2</sub> emissions so that the CII reflects at sea emissions only
- 3) Add a correction factor such as converting the port waiting time to equivalent distance travelled
- 4) Have two separate metrics: one “at sea” and one “at port”

#### **Box. 2. Definition of “at berth” emissions**

The Fourth IMO GHG Study (2020)<sup>10</sup> uses an at berth definition for ships stationary less than or equal to 1 nautical mile (nm) of a port. For liquid tankers (chemical, liquified gas, oil and other liquids), this is within 5nm of a port.

The benefits and limitations of Options 1, 2, 3, and 4, (also summarised in Table 1 below) are discussed in the sections that follow.

#### **Option 1 – “No Change”**

The benefit of Option 1 is no increase in administrative burden or additional legislation requirements. However, it is widely considered as insufficient for achieving decarbonisation goals. This is because it wrongly accounts for the “at port” emissions<sup>11-14</sup>.

This option also incentivises gaming behaviour, such as artificial increases in distances, e.g. detours<sup>15,16</sup>. Such behaviour improves the CII rating despite resulting in higher CO<sub>2</sub> emissions.

CII unfairly penalises for factors beyond the control of relevant stakeholders (ship operators, shipowners, ports and cargo owners). For instance, if a vessel is delayed at port, the CII rating worsens despite lower emissions since the vessel is not sailing<sup>9</sup>.

Ship operators can also be penalised for complying with standard clauses in charter contracts<sup>23</sup>, or factors such as vessel size<sup>19,24,25</sup>, vessel type<sup>26</sup>, and weather<sup>22,24</sup>. The CII benefits routes with stable and optimal speeds, which are typically longer routes, or vessels with stable contracts. For certain

charter contracts and vessel types, such as containerships, “just-in-time” arrival does not always happen due to meeting contractual obligations<sup>27</sup>. Larger ships have smaller speed adjustment ranges<sup>28</sup>, and smaller ships require greater power reductions and higher costs to comply<sup>4,24</sup>.

CII does not consider voyage routes<sup>17-19</sup>. Certain routes have worse CII ratings, such as shorter ones with more time manoeuvring or idling<sup>19-21</sup>, as well as those within Emission Control Areas (ECAs) due to low sulphur requirements that increase fuel consumption and emissions intensity<sup>17,22</sup>.

#### **Option 2 – “Exclude Port”**

The benefits of Option 2 are administrative and legislative simplicity, and compliance in the case of uncontrollable delays.

In principle, CII is meant to incentivise improvement of a ship's operational carbon intensity. Port emissions, in various ways, are outside the control of ship owners, e.g. reliance on the energy efficiency of the port's operation system and on what alternative low carbon energy systems are available. This, instead, could be incentivised by e.g. enhanced energy monitoring platforms, automated operation system, and provision of onshore power supply (OPS).

Evidence suggests that port regulations can effectively reduce GHG emissions and air pollution at ports. For instance, the ports of Las Palmas, St. Petersburg, and Hong Kong have reduced sulphur emissions up to 96%, and fine particulate matter (PM2.5) up to 80% with stricter measures<sup>29</sup>.

However, 10 to 20% of total fuel consumption CO<sub>2</sub> emissions are attributed to the time spent in and close to port<sup>21,10,30</sup>, and for cruise ships this is almost 50%<sup>9</sup>. Emissions in and around ports can have significant impacts on the health of nearby communities<sup>31,32</sup>. Excluding ports from the CII means not accounting for a large fraction of emissions and therefore impact on the health and wellbeing of surrounding areas.

The current CII includes port emissions, which can effectively encourage the collaboration between ports, ship operators, shipowners, and cargo owners to reduce emissions<sup>33</sup>. For instance, the arrangement of “just-in-time” arrivals can reduce port waiting time and emissions<sup>27,34</sup>.

There is a further concern that excluding port emissions will discourage collaboration for the

**Table 1. Comparison of Options 1-4**

Aspect	Option 1 "No Change"	Option 2 "Exclude Port"	Option 3 "Adjust Port"	Option 4 "Separate Metrics"
Administration	No increase in burden	Simple administration	Complex due to correction factors	Complex especially short-sea shipping
Legislation	No additional legislation	No additional legislation	Requires adjustment to current CII	Requires new framework for dual metrics
Emissions Representativeness	Poor – misrepresents port emissions	Poor - excludes port emissions	Partial – allows for port waiting time	High – differentiates between at-sea and at-port emissions
Gaming Risk	High – detours and distance inflation	Low	Medium – depends on accuracy of correction factors	Low
Alignment with Targets	Weak – considered insufficient	Weak – excludes port emissions	Moderate – improves fairness	Strong – holistic approach aligned with IMO NZF
Feasibility & Complexity	No change to current practices	Simple to implement	Moderate – data requirement issues	Complex – requires new reporting and monitoring
Health & Wellbeing	Negative – ignores local air quality impacts	Negative – excludes port emissions affecting communities	Limited – overlooks non-waiting port emissions	Positive – accounts for port emissions and supports well-to-wake principle
Collaboration Incentive	Discourages collaboration	May reduce collaboration between ports and ships	Encourages collaboration for just-in-time arrivals	Strongly incentivises holistic collaboration
Other notable points	Penalises uncontrollable factors (weather, ECAs, vessel size) Risk of carbon leakage	Lack of support for net-zero port initiatives	Risk of carbon leakage to shore emissions	Flexible compliance options, supports ETS and net-zero ports

ship-port and owner-charterer interfaces<sup>35</sup>. Therefore, this could also disincentivise vessel R&D for at-port operations.

**Option 3 – “Adjust Port”**

Option 3 is easier to implement than Option 4, as it only requires an adjustment. Option 3 encourages “just-in-time” arrivals. When the port waiting time is reasonably penalised, Option 3 could incentivise ship operators, shipowners, cargo owners, and ports to collaborate to reduce waiting time<sup>27</sup>.

The aim of Option 3 is to adjust for unavoidable port delays such as port congestion, weather-related restrictions, and regulatory inspections<sup>11,20,26</sup>. Previous reports and studies suggest introducing a “port waiting time” as a correction factor<sup>9,26</sup> or converting port-stay carbon emissions into an equivalent sailing distance<sup>11</sup>.

There are several limitations of Option 3 though. It poses administrative complexities since it is difficult to define “port waiting time”. The CII already has several correction factors that confuse vessel operators<sup>23</sup>. Data unavailability is a main challenge to apply accurate correction factors<sup>36,37</sup>. Lack of accuracy could still incentivise gaming behaviours, such as detours.

Similar to Option 1, Option 3 narrowly defines port decarbonisation as reducing the vessel emissions at port, which could lead to carbon leakage to onshore emissions. Because Option 3 suggests correcting for waiting time, it can overlook port emissions from other non-waiting

activities, such as cargo handling, dredging, manoeuvring support, tank cleaning, and bow thruster use<sup>23</sup>.

**Option 4 – “Separate Metrics”**

The analysis above suggests that it is not appropriate for a single CII metric to simultaneously capture at sea and at port emissions.

Compared to Option 3, Option 4 provides a holistic coverage and incentivises port decarbonisation<sup>12,21,22</sup>. This option better aligns with the recent IMO proposal to consider well-to-wake emissions in the NZF.

Combined with other policies (e.g. extending emissions trading schemes (ETS) to maritime and potential net-zero ports legislation), Option 4 provides more options and wider scope for stakeholders to collaborate on decarbonisation<sup>21,38-42</sup>. For example, in terms of cold ironing (shore power), optimisation of port operations to minimise idle times, and reducing cargo-handling emissions.

By differentiating between at sea and at port emissions, Option 4 allows for more accurate monitoring of a ship's operational performance and the part(s) where corrective action may need to be taken. Flexibility is one of the essential reasons for relatively low costs and wide acceptance of the CII, as shipowners and ship operators can choose from a variety of operational and investment options for compliance with it<sup>43,44</sup>. When stakeholders are given options to comply in a holistic ecosystem, port decarbonisation can be faster and more economical<sup>40</sup>.

A limitation of Option 4 is the added administrative burden. This is especially the case for short-sea shipping which is associated with numerous port calls.

### Recommendation

**The authors recommend implementing Option 4: Separate at-sea and at-port CII metrics.**

### How to Implement Option 4

There are 3 areas to support the implementation of Option 4: data collection and sharing; need to reflect different scenarios; and collaboration.

#### a) Data collection and sharing

There is insufficient live data to enable low-cost implementation of Option 4. Little data is publicly available for vessel emissions especially at small ports.

Automated data collection systems are required for effective and low-cost implementation of port decarbonisation<sup>34,40,45</sup>. To reduce administrative costs, it is important to enable real-time CII tracking for each vessel and collecting operational data at the end of each voyage as well as at port<sup>16,46-49</sup>. Currently, there are relatively advanced information systems in shipping, such as the automatic identification system (AIS) and IMO data collection system (DCS)<sup>27,34</sup>. In the future, and where appropriate, regulators may also use technologies such as blockchain to ensure security, data integrity and traceability<sup>16</sup>.

Encouraging public disclosure of vessels' CII could enhance data transparency<sup>20,35</sup>.

#### b) Need to reflect different scenarios

The CII standards for regulating port emissions should differentiate between vessel types, sizes, routes, weather, and operationality (for instance cargo/passenger handling)<sup>11,19,23-25,28</sup>.

Various vessel types need to be treated differently for their port emission standards. For instance, cruise ships can be unfairly penalised for their hotel load when waiting at ports<sup>9</sup>. If a separate at port CII standard is to be implemented, correction factors would still be needed for uncontrollable operational conditions - such as weather, routes, fuel type, and biofouling.

#### c) Collaboration

It would be beneficial to build a global port network<sup>47</sup>. Ports could then collaborate with each other, sharing good practices in the green transition or/and coordinating green fuel distributions.

Ports could act as policy enablers working together with shipping lines and energy providers<sup>40,41,47</sup>. Ports can use real-time supervisory and data acquisition platforms to optimise energy flows<sup>50</sup>.

### Interaction with Regional Regulations

The uncertainty around the implementation of IMO's landmark NZF may incentivise the adoption of further or/and stricter different regional decarbonisation regulations. The interaction between the CII and regional measures can incentivise gaming behaviours and/or carbon leakage.

Regional legislations include (but are not limited to):

- The European Union FuelEU Maritime Regulations<sup>51</sup>, which came into force in 2025. This includes GHG emission intensity reduction and mandatory use of alternative power sources in ports.
- EU ETS expansion to maritime<sup>52</sup> came into force in 2024 and requires relevant vessels to buy and surrender emission allowances for the GHG emissions produced when operating in the European Economic Area (EEA).
- UK ETS expansion to maritime<sup>53</sup>, which will come into force in July 2026 and requires relevant vessels operating within the UK to monitor, report, and surrender GHG emission allowances.

There are several issues with multiple regional regulations, and these include:

1. Increased costs and administrative complexity<sup>54</sup>. For instance, the low sulphur regulation for ECAs increases fuel consumption and emission intensity, making it more expensive to comply with CII<sup>13,17</sup>.
2. There are conflicting incentives. The CII incentivises optimising operational efficiency, which may not always align with minimising GHG emissions and, thus, ETS costs. For example, a ship might prefer

detouring through or operating in longer voyages to achieve a better CII rating but this may increase its total emissions and, thus, ETS costs<sup>54</sup>.

3. Factors outside the control of ship operators affect compliance with CII and regional regulations in different ways. For instance, ships in EU ports often have shorter voyages, higher ballast ratios, and more port calls. While these factors lead to worse CII ratings, they are accounted for under the EU Monitoring, Reporting, and Verification (MRV) regulation.

### Future Outlook

There is uncertainty surrounding the IMO's NZF, as to if, when, and in what form implementation will take place. In contrast, CII is already in place, and the industry and member states have widely accepted it due to its relative simplicity and practicality<sup>43</sup> and the fact that compliance does not require significant costs<sup>13,55</sup>.

The CII is the only measure that directly targets operational emissions and is under ongoing review. Ensuring its enforcement in practice and revising its design to become fairer and more effective provides an immediate way to further incentivise decarbonisation while the sector awaits decisions around an international decarbonisation framework.

By design, CII becomes stricter annually to motivate improvements in vessels' energy efficiency. As improved energy efficiency reduces fuel use and, in turn, emissions, it can support compliance with a future international decarbonisation framework<sup>56</sup> at lower costs. Namely, if the vessel burns fossil fuel, the total price that will need to be paid for GHG emissions will be lower due to lower fuel needs. If the vessel then switches to greener fuels, the total additional price that will need to be paid for the more expensive fuel will be less due to higher efficiency levels.

However, compliance with the CII (as it currently stands) without simultaneous adoption of zero or near-zero emission fuels, technologies or energy sources (ZNZs) may be insufficient for compliance with an international decarbonisation framework in the longer run. On the other hand, adoption of ZNZs can ensure compliance with CII as the latter becomes progressively stricter. Note that around 36% of the dry bulk, tanker, and container fleet is estimated to be rated D or E in 2026<sup>57</sup>, i.e. noncompliant (Figure 1). Note too

that, as of December 2025, only 9% of the global fleet and c.50% of the orderbook (in gross tonnage terms) are alternative fuel capable<sup>57</sup>.

The CII applies to a variety of vessel types to reduce emissions, including containerships, dry bulkers, gas carriers, general cargo carriers, tankers, vehicle carriers, and cruise ships<sup>13,18,43,58</sup>. CII can act as a good example of an international decarbonisation policy that motivates further global regulations.

It can also help to create a database to encourage international collaboration and data sharing between ship operators, ports, and cargo owners<sup>33,34,59</sup>. Such data availability and transparency will be essential for the successful implementation of an international decarbonisation framework.

### Additional Recommendations

It is recommended that some additional revisions to the CII are considered, particularly in the longer run, irrespective of which of Options 1-4 is adopted. These are as follows:

- The current CII uses the vessel's nominal transport capacity and fails to consider the actual cargo carried<sup>11,44</sup>. In other words, the CII fails to motivate vessels to produce more transport work per unit of emissions. If a vessel sails frequently on ballast, it produces less transport work but has similar CII ratings<sup>23</sup>. Therefore, allowing for actual cargo data would provide a more accurate measure of the attained CII<sup>23,56</sup>. As such, instead of transport capacity weight in Box 1, "cargo mass + ballast mass" can be used in the denominator in the CII equation<sup>16</sup>.
- The current CII fails to consider other important GHG emissions such as methane<sup>57</sup> and whole lifecycle (referred to as "well-to-wake") emissions. As such, the numerator of the formula should capture well-to-wake GHG emissions in terms of CO<sub>2</sub> equivalent<sup>56,58</sup>. This would ensure consistency with regional measures such as the EU and UK ETS and FuelEU Maritime.
- The CII formula could account for GHG emissions associated with the pilot fuel. Pilot fuel is a small amount of conventional fuel used for ignition in dual-fuel combustion engines where low carbon fuels with poor ignition characteristics, such as ammonia, are used<sup>60</sup>.

## CONTACT

### Dr Ioannis Moutzouris

Associate Professor, Bayes Business School, City St George's, University of London  
E: ioannis.moutzouris@citystgeorges.ac.uk

### Dr Yao Shi

Research Fellow, Bayes Business School, City St George's, University of London  
E: yao.shi@citystgeorges.ac.uk

### Dr Claire Copeland

Policy Fellow, Clean Maritime Policy Unit  
E: claire.copeland@durham.ac.uk

*The UK National Clean Maritime Research Hub is funded by the Department for Transport and EPSRC with pioneering research aims to accelerate the decarbonisation and elimination of air pollution from maritime activity in ports and at sea. <https://www.clean-maritime-research-hub.org/>*

## ENDNOTES

- [1] Clarksons' SIN. 2025. "Clarksons' Shipping Intelligence Network." <https://sin.clarksons.net/>.
- [2] IMO, International Maritime Organization. 2023. "2023 IMO Strategy on Reduction of GHG Emissions from Ships." <https://www.imo.org/en/OurWork/Environment/Pages/2023-IMO-Strategy-on-Reduction-of-GHG-Emissions-from-Ships.aspx>.
- [3] International Maritime Organization (IMO). *EEXI and CII – Ship Carbon Intensity and Rating System*. IMO Media Centre. Accessed December 3, 2025. <https://www.imo.org>
- [4] Vasilev, M., Kalajdžić, M., & Momčilović, N. (2025). On energy efficiency of tankers: EEDI, EEXI and CII. *Ocean Engineering*, 317, 120028.
- [5] Ashry, T. A., Nasr, N. A., Fahim, N. S., & Marey, N. A. (2024). A field study onboard VLCCs for CO<sub>2</sub> emission reduction considering EEDI and SEEMP. *Alexandria Engineering Journal*, 108, 662-675.
- [6] IMO, International Maritime Organization. 2022. 2022 Guidelines on Operational Carbon Intensity Indicators and the Calculation Methods (CII Guidelines, G1). Available at: [https://www.wcdn.imo.org/localresources/en/OurWork/Environment/Documents/Air%20pollution/MEPC.352\(78\).pdf](https://www.wcdn.imo.org/localresources/en/OurWork/Environment/Documents/Air%20pollution/MEPC.352(78).pdf).
- [7] UK Department for Transport. (2025, March 25). Maritime decarbonisation strategy. GOV.UK. Available at: <https://www.gov.uk/government/publications/maritime-decarbonisation-strategy>
- [8] Royal Institution of Naval Architects (RINA). (2025, January 10). *Still plenty to unpack and untangle in CII*. The Naval Architect – News. Retrieved December 3, 2025, from <https://www.rina.org.uk>
- [9] Clarksons Research. (2025a, October). CO<sub>2</sub> Benchmark Tracker – Fleet Average CO<sub>2</sub> Output (Beta). Retrieved from <https://www.clarksons.net>
- [10] International Maritime Organization (IMO). (2020). *Fourth IMO greenhouse gas study 2020*. London: IMO. Retrieved from: <https://www.imo.org/en/ourwork/environment/pages/fourth-imo-greenhouse-gas-study-2020.aspx>
- [11] Brazil, Republic of Korea, & United Arab Emirates. (2025a). Further consideration of possible options to address the identified challenges/gaps in the short-term GHG reduction measure: Definition of the concept of port waiting time and the proposed CII reduction factors for 2027 to 2030 (ISWG-APPEE 1/2/2). Intersessional Meeting of the Working Group on Air Pollution and Energy Efficiency, 1st session, International Maritime Organization.
- [12] RINA. (2025, February 18). Further consideration of possible options to address the identified challenges/gaps in the short-term GHG reduction measure: Revised CII metric (ISWG-APPEE 1/2/8). Intersessional Meeting of the Working Group on Air Pollution and Energy Efficiency, IMO.
- [13] Bayraktar, M., & Yuksel, O. (2023). A scenario-based assessment of the energy efficiency existing ship index (EEXI) and carbon intensity indicator (CII) regulations. *Ocean Engineering*, 278, 114295.
- [14] Yan, D., Chen, C., Gan, W., Sasa, K., He, G., & Yu, H. (2025). Carbon intensity indicator (CII) compliance: Applications of ship speed optimization on each level using measurement data. *Marine Pollution Bulletin*, 212, 117593.
- [15] Wang, S., Psaraftis, H. N., & Qi, J. (2021). Paradox of international maritime organization's carbon intensity indicator. *Communications in Transportation Research*, 1, 100005.
- [16] Masodzadeh, P. G., Ölçer, A. I., Ballini, F., & Celis, J. G. (2024a). Live carbon-tracking mechanism for ships, a methodology to mitigate uncertainties in the carbon intensity calculations. *Transportation Research Interdisciplinary Perspectives*, 23, 101004.
- [17] Yuan, Q., Wang, S. and Peng, J. (2023). Operational efficiency optimization method for ship fleet to comply with the carbon intensity indicator (CII) regulation. *Ocean Engineering*, 286, p.115487.
- [18] Bayramoğlu, K. (2024). The effects of alternative fuels, cruising duration and variable generators combination on exhaust emissions, energy efficiency existing ship index (EEXI) and carbon intensity rating (CII). *Ocean Engineering*, 302, 117723.
- [19] Zhang, J., Zhang, Z., & Liu, D. (2024). Comparative Study of Different Alternative Fuel Options for Shipowners Based on Carbon Intensity Index Model Under the Background of Green Shipping Development. *Journal of Marine Science and Engineering*, 12(11), 2044.
- [20] Lee, J. W., Vuong, Q. D., & Lee, J. U. (2025). Operational Strategies for CII Under Short Voyages: Hybrid Denominator Correction and CPP Mode Optimization. *Journal of Marine Science and Engineering*, 13(10), 2010.
- [21] Brazil, Japan, & European Commission. (2025b, January 31). Report of the Correspondence Group on the review of the short-term GHG reduction measure (challenges/gaps #1 and #3 to #21) (MEPC 83/6/9). Marine Environment Protection Committee, 83rd Session, International Maritime Organization.
- [22] United Kingdom (UK), RINA, & World Shipping Council. (2025, February 18). A SEEMP based approach to energy efficiency (ISWG-APPEE 1/2/7). Intersessional Meeting of the Working Group on Air Pollution and Energy Efficiency, IMO.
- [23] Kim, H., Yeo, S., Lee, J., & Lee, W. J. (2023). Proposal and analysis for effective implementation of new measures to reduce the operational carbon intensity of ships. *Ocean Engineering*, 280, 114827.
- [24] Herdžik, J. (2023). Possibilities of Fulfillment and Consequences of Introducing the Carbon Intensity Indicator in International Shipping. *Rocznik Ochrona Środowiska*, 25.
- [25] Li, L., Wang, Y., Liu, J., Chen, J., & Yang, W. (2025). Evaluating the fairness and effectiveness of the IMO carbon intensity indicator for container ships. *Maritime Policy & Management*, 1-19.
- [26] Braidotti, L., Bertagna, S., Rappocci, R., Utzeri, S., Bucci, V., & Marinò, A. (2023). On the inconsistency and revision of Carbon Intensity Indicator for cruise ships. *Transportation Research Part D: Transport and Environment*, 118, 103662.
- [27] Kim, B. R., & Cheon, J. (2025). Impact of Reducing Waiting Time at Port Berths on CII Rating: Case Study of Korean-Flagged Container Ships Calling at Busan New Port. *Journal of Marine Science and Engineering*, 13(9), 1634.
- [28] Sun, W., Tang, S., Liu, X., Zhou, S., & Wei, J. (2022). An improved ship weather routing framework for CII reduction accounting for wind-assisted rotors. *Journal of marine science and engineering*, 10(12), 1979.
- [29] Tichavska, M., Tovar, B., Gritsenko, D., Johansson, L., & Jalkanen, J. P. (2019). Air emissions from ships in port: Does regulation make a difference?. *Transport policy*, 75, 128-140.
- [30] European Maritime Safety Agency (EMSA). (2025). EU-MRV system to report GHG emissions from ships. Retrieved from <https://emsa.europa.eu>

- [31] Mueller, N., Westerby, M., & Nieuwenhuijsen, M. (2023). Health impact assessments of shipping and port-sourced air pollution on a global scale: A scoping literature review. *Environmental Research*, 216, 114460.
- [32] Gurgatz, B. M., Moreira, C. A. B., Natalino, L., Albrecht, J. S. C., Garcia, M. R., Joucowski, E., ... & Godoi, R. H. M. (2025). Assessment and source apportionment of PM<sub>2.5</sub> in a major Latin American port: elevated concentrations from traffic in the Great Atlantic Forest Reserve. *Air Quality, Atmosphere & Health*, 18(3), 775-791.
- [33] Rebelo, P. (2024). Green Shipping Contracts: A Contract Governance Approach to Achieving Decarbonisation in the Shipping Sector. Bloomsbury Publishing.
- [34] Kim, M., Lee, J. Y., An, S., & Hwang, D. J. (2024). Proposals on effective implementation of the carbon intensity indication of ships. *Journal of Marine Science and Engineering*, 12(11), 1906
- [35] Pacific Environment & Clean Shipping Coalition (CSC). (2025, February 18). Maximizing emission reductions, minimizing costs, meeting IMO goals (ISWG-APEE 1/2/11). Intersessional Meeting of the Working Group on Air Pollution and Energy Efficiency, IMO.
- [36] Sardar, A., Anantharaman, M., Islam, T. M. R., & Garaniya, V. (2025). Data collection framework for enhanced carbon intensity indicator (CII) in the oil tankers. *The Canadian Journal of Chemical Engineering*, 103(1), 170–187.
- [37] Yan, D., Chen, C., Gan, W., Sasa, K., He, G., & Yu, H. (2025). Carbon intensity indicator (CII) compliance: Applications of ship speed optimization on each level using measurement data. *Marine Pollution Bulletin*, 212, 117593.
- [38] Buonomano, A., Del Papa, G., Giuzio, G. F., Palombo, A., & Russo, G. (2023). Future pathways for decarbonization and energy efficiency of ports: Modelling and optimization as sustainable energy hubs. *Journal of Cleaner Production*, 420, 138389.
- [39] Rauca, L. and Batrinca, G., 2023. Impact of carbon intensity indicator on the vessels' operation and Analysis of Onboard Operational Measures. *Sustainability*, 15(14), p.11387.
- [40] Renken, K. How a Value Chain Approach Plays Out in Maritime Decarbonization. *Maritime Decarbonization*, 141.
- [41] Ejder, E., Dinçer, S., & Arslanoglu, Y. (2024). Decarbonization strategies in the maritime industry: An analysis of dual-fuel engine performance and the carbon intensity indicator. *Renewable and Sustainable Energy Reviews*, 200, 114587.
- [42] Pivetta, D., Dall'Armi, C., Sandrin, P., Bogar, M., & Taccani, R. (2024). The role of hydrogen as enabler of industrial port area decarbonization. *Renewable and Sustainable Energy Reviews*, 189, 113912.
- [43] Garbatov, Y., & Georgiev, P. (2024). Markovian Maintenance Planning of Ship Propulsion System Accounting for CII and System Degradation. *Energies*, 17(16), 4123.
- [44] Hua, R., Yin, J., Wang, S., Han, Y., & Wang, X. (2024). Speed optimization for maximizing the ship's economic benefits considering the Carbon Intensity Indicator (CII). *Ocean Engineering*, 293, 116712.
- [45] Ghaforian, M. P. (2022). *New Formulation in Calculation of Carbon Intensity: Role of Ports in A Robust Data Collection Mechanism*.
- [46] Wang, S., Psaraftis, H. N., & Qi, J. (2021). Paradox of international maritime organization's carbon intensity indicator. *Communications in Transportation Research*, 1, 100005.
- [47] Masodzadeh, P. G., Ölçer, A. I., Ballini, F., & Dalaklis, D. (2024b). The contribution of ports to shipping decarbonization: An analysis of port incentive programmes and the executive role of port state control. *Transport Economics and Management*, 2, 191-202.
- [48] Taghavifar, H. (2025). Creating a digital twin platform for maritime decarbonization by AI-assisted CII measure prediction: A case of chemical tanker. *Maritime Transport Research*, 9, 100141.
- [49] Wei, Q., Liu, Y., Dong, Y., & Frangopol, D. M. (2025). Carbon intensity indicator rating-based ship retrofit strategy framework via deep reinforcement learning. In *Life-Cycle Performance of Structures and Infrastructure Systems in Diverse Environments* (pp. 1423-1430). CRC Press.
- [50] Yildiz, R. O., Koc, E., Der, O., & Aymelek, M. (2024). Unveiling the contemporary research direction and current business management strategies for port decarbonization through a systematic review. *Sustainability*, 16(24), 10959.
- [51] European Commission. (2025a). Decarbonising maritime transport – FuelEU Maritime. Mobility and Transport. Retrieved from [https://transport.ec.europa.eu/transport-modes/maritime/decarbonising-maritime-transport-fueu-maritime\\_en](https://transport.ec.europa.eu/transport-modes/maritime/decarbonising-maritime-transport-fueu-maritime_en)
- [52] European Commission. (2025b). EU Emissions Trading System (EU ETS). Directorate-General for Climate Action. Retrieved from [https://climate.ec.europa.eu/eu-action/carbon-markets/eu-emissions-trading-system-eu-ets\\_en](https://climate.ec.europa.eu/eu-action/carbon-markets/eu-emissions-trading-system-eu-ets_en)
- [53] UK Department for Energy Security & Net Zero. (2025, November 4). UK Emissions Trading Scheme (UK ETS): a policy overview. GOV.UK. Retrieved from <https://www.gov.uk/government/publications/uk-emissions-trading-scheme-uk-ets-policy-overview/uk-emissions-trading-scheme-uk-ets-a-policy-overview>
- [54] Baumann, J. (2025). Running a tight ship? From EU coordination to action on emissions in the IMO. *European Politics and Society*, 1-20.
- [55] Zincir, B. (2023). Slow steaming application for short-sea shipping to comply with the CII regulation. *Brodogradnja: An International Journal of Naval Architecture and Ocean Engineering for Research and Development*, 74(2), 21-38.
- [56] UNCTAD (2025). Review of Maritime Transport 2025: Staying the Course in Turbulent Waters. United Nations Conference on Trade and Development, Geneva. UNCTAD/RMT/2025 (Overview). Available under Creative Commons license: <http://creativecommons.org/licenses/by/3.0/igo/>
- [57] Clarksons Research. (2025c, December 1). Fuelling Transition: Tracking the Economic Impact of Emission Reductions & Fuel Changes. World Fleet Register. Retrieved from <http://www.clarksons.net>
- [58] Gianni, M., Pietra, A., Coraddu, A., & Taccani, R. (2022). Impact of SOFC power generation plant on carbon intensity index (CII) calculation for cruise ships. *Journal of marine science and engineering*, 10(10), 1478.
- [59] Yang, H., Ren, F., Yin, J., Wang, S., & Khan, R. U. (2025). Tramp Ship Routing and Scheduling with Integrated Carbon Intensity Indicator (CII) Optimization. *Journal of Marine Science and Engineering*, 13(4), 752.
- [60] Avaritsioti, E. I. (2025). Shipping decarbonisation: Financial and business strategies for UK shipowners. *Journal of Risk and Financial Management*, 18(7), 391.